



**C.E.B. IMPIANTI s.r.l.**

IMPIANTI DI LAVAGGIO PER L'INDUSTRIA  
WASHING PLANTS FOR INDUSTRY

**Model EW100/S**  
**LOW PRESSURE (at 40bar)**  
**SOLVENT WASHING EQUIPMENT**  
**suitable for inside washing of open tanks and IBCs**



(Example picture only)

via Stab. Figliodoni, 14 - 23891 Barzanò (LC) - Italy  
Tel. +39 039 958482 - Fax +39 039 9217563  
[www.cebimpianti.com](http://www.cebimpianti.com) - [info@cebimpianti.com](mailto:info@cebimpianti.com)  
VAT Nr. 02652530961




## MAIN TECHNICAL FEATURES

<b>Applicable to models</b> EW100/Sc - EW100/Sv - EW100/Scv	
<i>Insulation</i>	Atex   CE  II2G IIB T4
<i>PLC</i>	SIEMENS S7/1200
<i>Cycle process time</i>	Programmable
<i>Compressed air</i>	7 Bar
<i>Supply</i>	3x400 V – 50 Hz (different on request)
<i>Installed power</i>	7,5 kW / 9 kW (when at 60lt/min)
<i>Motor</i>	5,5 kW / 7,5 kW (when at 60lt/min)
<i>Overall dimensions</i>	See lay out
<i>Washing media</i>	solvents
<i>Washing pressure</i>	max 40 bar – adjustable
<i>Flow</i>	30 lit/min / 60 lit/min (for stainless steel IBCs)
<i>Washing pump</i>	High pressure pump
<i>Rinsing pump</i>	Double diaphragm at 1"
<i>Emptying pump</i>	Double diaphragm at 1"
<i>Feeding pump</i>	High pressure pump
<i>Loading cage</i>	Equipped with tilting platform
<i>Sealing</i>	<b>c</b> models Cone, standard from $\varnothing$ 150mm to 250mm <b>v</b> models Flange, standard $\varnothing$ 1600mm (-150mm) <b>cv</b> models Flange standard $\varnothing$ 1600mm (-150mm) + cone (standard $\varnothing$ 150mm to 250mm) Optional according to diameter (upon request)
<i>Vessel diameter</i>	from 800mm to 1600mm
<i>Vessel height</i>	from 900mm to 1650mm (total height 1950mm, wheels included) with minimal distance from floor of 150mm
<i>Column height</i>	Standard 2800mm Optional according to vessel (upon request)
<i>Filters</i>	Nr. 2 stainless steel filters: * first one (400 $\mu$ ) for residual liquid * second one (200 $\mu$ ) for the high-pressure pump protection
<i>Washing time</i>	The cycle time can be selected by the operator. The whole cycle lasts usually between 3 to 5 minutes
<i>Safety devices</i>	Cover lowering sensor Washing liquid flow sensor Compressed air sensor Cleaning media flow sensor Nitrogen blanketing system ready Suction valve for connection to customer's compressed air piping Atex grounding clamp

**Technical features may change without prior notice.  
Consult with CEB Impianti for the latest version available.**

## SEALING

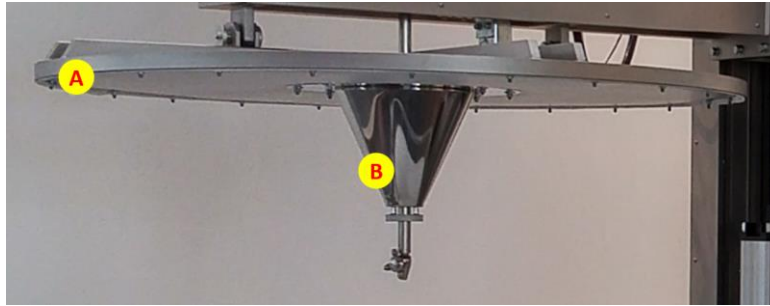

<b>A</b>	<b>EW100/Sv</b>	for open tanks
<b>B</b>	<b>EW100/Sc</b>	for IBCs
<b>A+B</b>	<b>EW100/Scv</b>	for open tanks and IBCs

## TANK SIZES ON EW100:

### Open tank vessels

**Ø Tank**

800mm ~ 1450mm (31,5" ~ 57")  
Up to 1550mm (61")  
Up to 1650mm (65")

**Ø Cover**

1600mm (63")  
1700mm (67")  
1800mm (70,86")

**Height (without wheels)**

900mm ~ 1650mm (35,5" ~ 65")

**Height (with wheels)**

Up to 1950mm (76,77")

**NOTE:**

- with minimal distance from floor of 150mm (2")
- Tanks must be equipped with bottom drain valve on the side at 3"

### 1000lt IBCs in HDPE

**Ø Hole**

150mm ~ 250mm (2" ~ 57")

**Height**

International standards, but accepted up to 1950mm (76,77")

**NOTE:**

- Tanks must be equipped with bottom drain valve on the side at 3"

### 1000lt IBCs in stainless steel

**Ø Hole**

150mm ~ 250mm (2" ~ 57")

For bigger diameters, an adapter is required


**Height**

International standards, , but accepted up to 1950mm (76,77")

**NOTE:**

- Tanks must be equipped with bottom drain valve on the side at 3"

## LAYOUT (indicative)

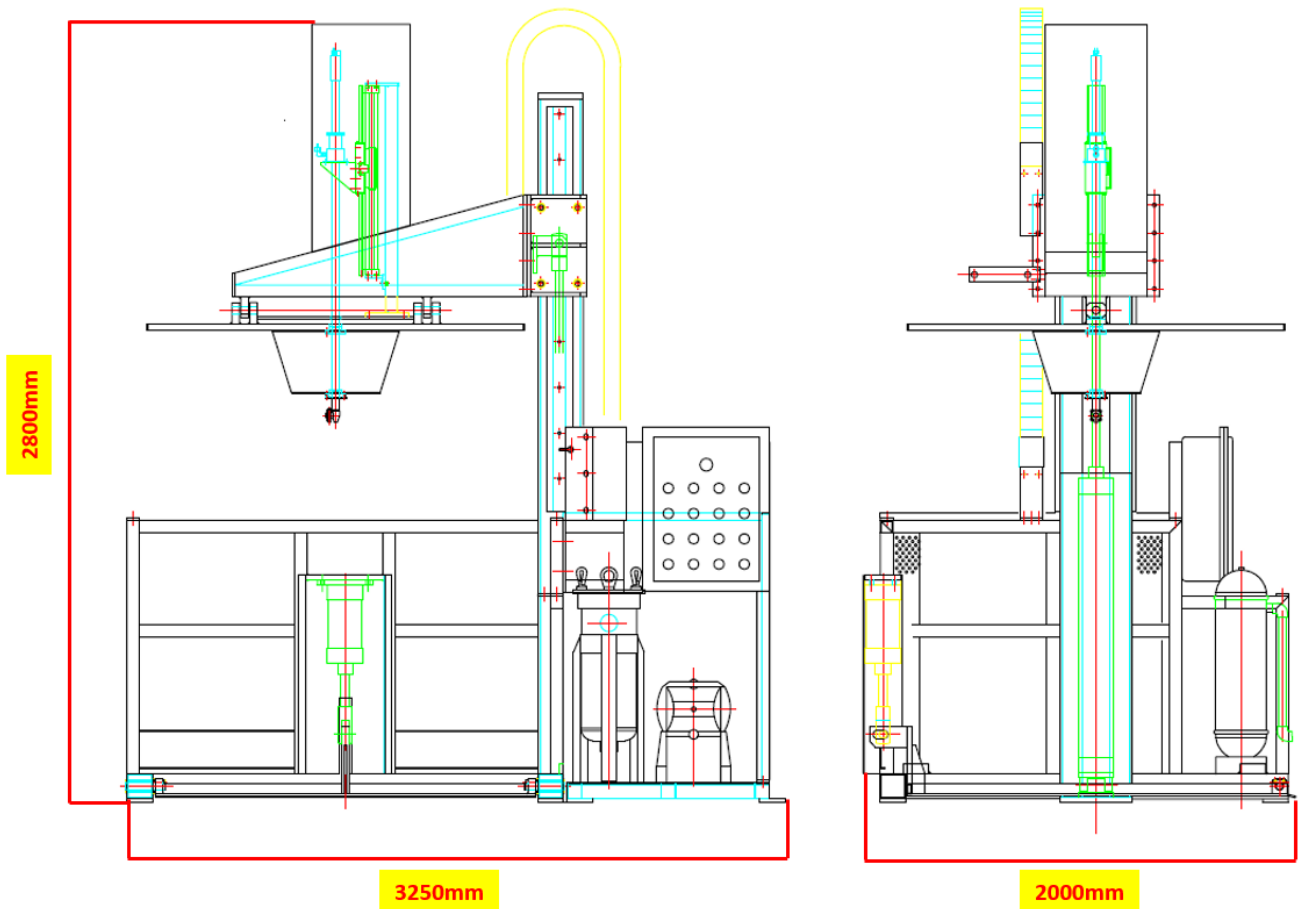

**Check your technical request and the dimensions of your containers  
with CEB Impianti before considering the use of the present washing machine**

**CEB Impianti S.r.l.**  
via Stab. Figliodoni, 14 - 23891 Barzanò (LC) - Italy  
Tel. +39 039 958482 - Fax +39 039 9217563  
VAT Nr. 02652530961

February 2019 – Rev. A