



C.E.B. IMPIANTI s.r.l.

IMPIANTI DI LAVAGGIO PER L'INDUSTRIA
WASHING PLANTS FOR INDUSTRY

Model
EWEC/A- EWEC/AX
EWEC2/A - EWEC2/AX
HIGH PRESSURE (at 250 bar)
WATER WASHING EQUIPMENT
suitable for inside and outside washing of drums and buckets



Note: the present picture shows the double station model EWEC2/AX (tanks not included)

via Stab. Figliodoni, 14 - 23891 Barzanò (LC) - Italy
Tel. +39 039 958482 - Fax +39 039 9217563
www.cebimpianti.com - info@cebimpianti.com
VAT Nr. 02652530961



MAIN TECHNICAL FEATURES

Applicable to models EWEC/A – EWEC/AX – EWEC2/A – EWEC2/AX	
<i>Insulation</i>	IP55
<i>PLC</i>	SIEMENS S7/1200
<i>Cycle process time</i>	Programmable
<i>Compressed air</i>	7 Bar
<i>Supply</i>	3x400 V – 50 Hz (different on request)
<i>Installed power</i>	20 kW
<i>Motor</i>	18,5 kW
<i>Overall dimensions</i>	See lay out
<i>Washing media</i>	Water / water + detergents / detergents / sanitizers
<i>Washing pressure</i>	250 bar – adjustable
<i>Flow</i>	37 lit/min
<i>Temperature</i>	Max 70°
<i>Washing pump</i>	High pressure pump
<i>Rinsing pump</i>	Double diaphragm at 1"
<i>Emptying pump</i>	Double diaphragm at 1"
<i>Feeding pump</i>	High pressure pump
<i>Loading cage</i>	Equipped with tilting clamp
<i>Sealing</i>	Door
<i>Drum diameter</i>	Up to 572mm (22,5")
<i>Vessel height</i>	Up to 850mm (33,5")
<i>Filters</i>	Nr. 2 stainless steel filters: * first one (400μ) for residual liquid * second one (200μ) for the high-pressure pump protection
<i>Washing time</i>	The cycle time can be selected by the operator. The whole cycle lasts usually between 1 to 2 minutes
<i>Safety devices</i>	Cover lowering sensor Washing liquid flow sensor Compressed air sensor Cleaning media flow sensor

**Technical features may change without prior notice.
Consult with CEB Impianti for the latest version available.**

Versions available



EWEC/A



EWEC2/A



EWEC/AX



EWEC2/AX

TANK SIZES



**Plastic barrels,
bins and pails**




**Metallic barrels,
bins and drums (open top and with cap)**

from 20lt up to 200lt.

- Min hole diameter for closed top drums/buckets: 2"

LAYOUT (indicative)

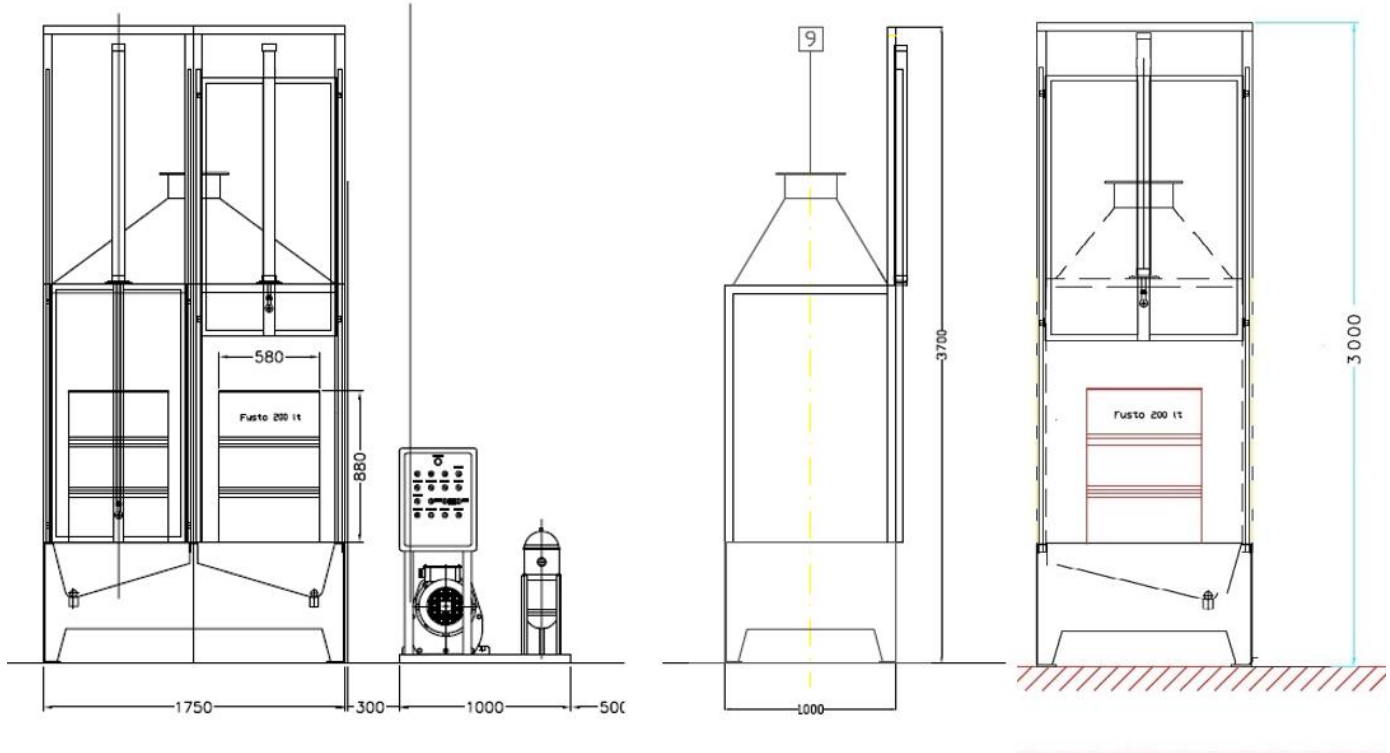

**Check your technical request and the dimensions of your containers
with CEB Impianti before considering the use of the present washing machine**

CEB Impianti S.r.l.
via Stab. Figliodoni, 14 - 23891 Barzanò (LC) - Italy
Tel. +39 039 958482 - Fax +39 039 9217563
VAT Nr. 02652530961

February 2019 – Rev. A